



FRAME


DIMENSIONS	T	R	D	MASS
Standard Grate	44	660	41	Frame 72 kg \pm 5%
Grate With Optional Rib	38	535	70	Grate 54 Kg \pm 5%




SECTION A-A

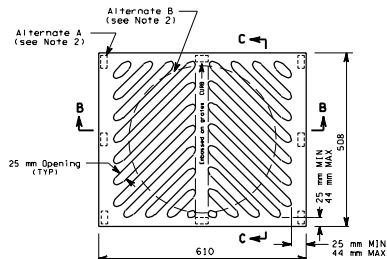

GRATE




SECTION C-C

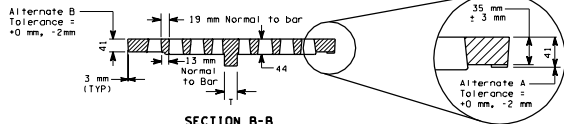


SECTION B-B

NOTES

- 3" to 5" Draft permitted as needed.
- Seating of grate shall be accomplished by one of the following: Alternate A shall be eight pads 38 mm x 19 mm x 3 to 6 mm integrally cast with the grate. Alternate B shall be a machined surface outside a 425 mm circle, bottom only. (See Section B-B).
- Tolerance on all dimensions shall be ± 2 mm unless otherwise noted.



OPTIONAL RIB - BOTTOM VIEW



OPTIONAL DESIGN FOR GRATE OPENING ENDS

ALL DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE NOTED
**METAL FRAME AND GRATE
FOR CATCH BASIN AND INLET**